


Compact Splicing Connectors Wiring Instruction

Wiring Guide


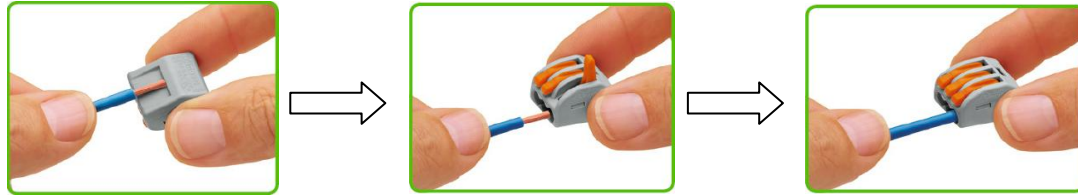


(1) Strip wire: 9-10mm

(2) Push up lever, insert conductor

(3) Push down lever

Details information

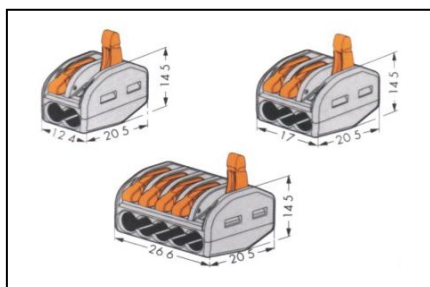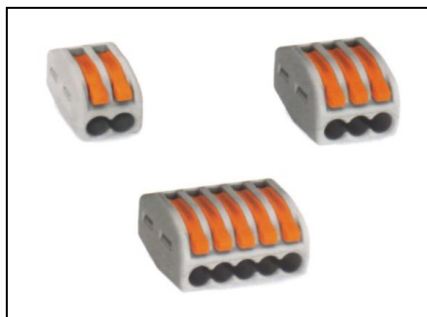

Voltage	600V(ul)/400V(iec)
Current	20A(ul)/32A(iec)
Cross Section	28-14AWG/0.08-4mm ²
Strip length	9-10mm
Maximum operating temperature	105 °C
Approved	CE/ROHS
Conductor type	(1)Solid
	(2)Stranded
	(3) fine stranded
	(4)fine stranded, tip bonded
	(5)fine stranded with crimp ferrule
	(6)find stranded with crimped pin terminal



Solid



Stranded



Fine stranded



Fine stranded
tip bonded



Fine stranded with
crimp ferrule



Find stranded with
crimped pin terminal

Application:

